

CE



2 YEARS WARRANTY

# FS4033E

## REBAR BENDING MACHINE

	singlephase	220V	50Hz/60Hz	2,2 kW [3 Hp]
	threephase	220V	60Hz	
		440V	50Hz/60Hz	
		400V	50Hz/60Hz	

### DIMENSIONS

Effective	cm 83 x 80 x H85
On Pallet*	cm 105 x 80 x H100**

\* standard packing with cardboard, protective film and plastic strips  
\*\* INDICATIVE PACKING

### WEIGHT

Effective	kg 288
On Pallet*	kg 318**

	SAE 40			11 rpm
	kg 5			

### BENDING CAPACITY



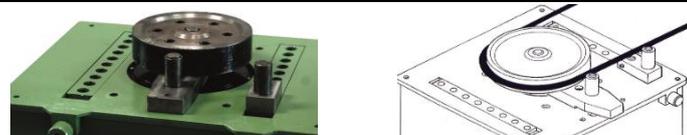
R. = 65 Kg. / mm <sup>2</sup>			R. = 85 Kg. / mm <sup>2</sup>		
1 Ø	2 Ø	3 Ø	1 Ø	2 Ø	3 Ø
30	22	18	28	20	16

ALL TECHNICAL DATAS ARE SUBJECT TO CHANGE WITHOUT NOTICE DUE TO TECHNICAL IMPROVEMENTS

### STANDARD EQUIPMENT

<p><b>Turning plate Ø335mm</b></p> <p>Bushes up to Ø168mm Ø228mm in case of BIG RADIUS EQUIPMENT</p> 	<p>5 bushes Ø 50 - 60 - 70 - 80 - 95 mm, 1 hardened square pin; 1 hardened stirrup bending pin; 3 hardened bush holding pins; 1 checking block; 1 pedal for remote control;</p> 	<p><b>Long saddles</b></p> <p>Essentials for double bending</p> 
--	--	---

### OPTIONALS

<p><b>Spiral equipment</b></p> <p>A device that allows you to fabricate rebar spiral, using bars up to Ø 16mm.</p> 	<p><b>Bench with rollers</b></p> 	<p><b>2 speed motor</b></p> <p>Ideal solution to optimize the production time</p> <p>ONLY 3-PHASE</p> 	<p><b>"2INI" stirrup bender and linear measurer</b></p> <p>It allows to know the length of the stirrups starting from the point of bending and to bend together more bars with the highest precision.</p> 
<p><b>Big radius equipment</b></p> 	<p><b>20 ANGLES Control Panel</b></p> <p>ONLY 3-PHASE</p> 	<p><b>6 ANGLES Control Panel</b></p> 	



FEAL-SEAM S.r.l.  
Via dell'Isola, 1/a  
23900 Lecco (LC) - Italy  
info@feal-seam.it  
www.rebar-machines.com