



**2
YEARS
WARRANTY**

FS4037E

REBAR BENDING MACHINE



singlephase	220V	50Hz/60Hz	3 kW [4 Hp]
threephase	220V	60Hz	
	440V	50Hz/60Hz	
	400V	50Hz/60Hz	

DIMENSIONS

Effective	cm 94 x 90 x H85
On Pallet*	cm 105 x 90 x H100**

* standard packing with cardboard, protective film and plastic strips
** INDICATIVE PACKING

WEIGHT

Effective	kg 352
On Pallet*	kg 382**



SAE 40
kg 8



9 rpm

BENDING CAPACITY

R. = 65 Kg. / mm²

R. = 85 Kg. / mm²

1 Ø	2 Ø	3 Ø	1 Ø	2 Ø	3 Ø
34	26	20	32	24	18

ALL TECHNICAL DATAS ARE SUBJECT TO CHANGE WITHOUT NOTICE DUE TO TECHNICAL IMPROVEMENTS

STANDARD EQUIPMENT

Turning plate Ø395mm with long saddles

Bushes up to Ø224mm
Ø288mm in case of BIG RADIUS EQUIPMENT



6 bushes Ø 60 - 70 - 80 - 95 - 120 - 130 mm, 1 hardened square pin; 1 hardened stirrup bending pin; 3 hardened bush holding pins; 1 checking block; 1 pedal for remote control;



OPTIONAL


4 Long saddles



OPTIONALS

Spiral equipment

A device that allows you to fabricate rebar spiral, using bars up to Ø 16mm.



Bench with rollers



2 speed motor


Ideal solution to optimize the production time

ONLY 3-PHASE




"2IN1" stirrup bender and linear measurer

It allows to know the lenght of the stirrups starting from the point of bending and to bend together more bars with the highest precision.



Big radius equipment

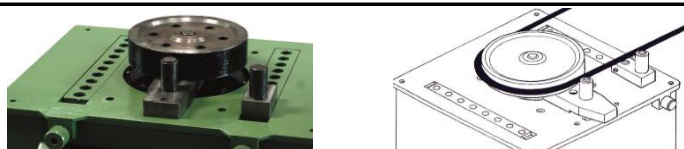

20 ANGLES Control Panel



6 ANGLES Control Panel



ONLY 3-PHASE



FEAL-SEAM S.r.l.

Via dell'Isola, 1/a

23900 Lecco (LC) - Italy

info@feal-seam.it

www.rebar-machines.com