

**2
YEARS
WARRANTY**



FS2043E

REBAR CUTTING MACHINE

	singlephase	220V	50Hz/60Hz	3 kW [4 Hp]
	threephase	220V	60Hz	
		440V	50Hz/60Hz	
		400V	50Hz/60Hz	

DIMENSIONS

Effective	cm 98 x 56 x H77
On Pallet*	cm 105 x 75 x H92**

* standard packing with cardboard, protective film and plastic strips
** INDICATIVE PACKING

WEIGHT

Effective	kg 397
On Pallet*	kg 427**

	SAE 220		CUTS/min	40
	kg 2			

CUTTING CAPACITY

R. = 65 Kg. / mm²

R. = 85 Kg. / mm²


1 Ø	2 Ø	3 Ø	1 Ø	2 Ø	3 Ø
34	28	22	30	22	18

ALL TECHNICAL DATAS ARE SUBJECT TO CHANGE WITHOUT NOTICE DUE TO TECHNICAL IMPROVEMENTS

STANDARD EQUIPMENT


Blades

2 interchangeable blades in hardened steel, with four cutting edges, already fixed on the machine



Simplified greasing system

The machine has 3 greasing point in order to simplify the maintenance

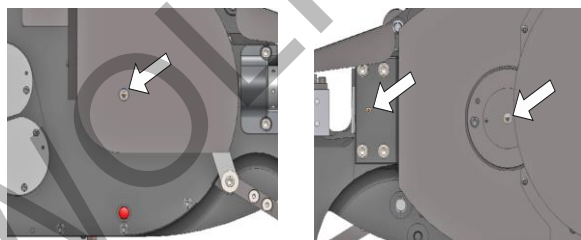

Screw Locator

Adjustable according to bar's diameter and bars' quantity to cut, it allows perfect alignment of one or more rods towards the blade and the achievement of perfectly perpendicular cuts.




OPTIONALS

Special Basement



Bench with rollers

Starting from 2m length. Galvanized steel

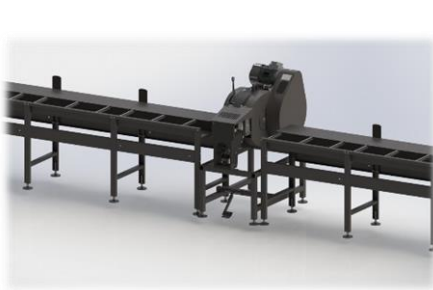

5 pin plug

PHASE INVERTING TURRET
Easiest system to change the phase in case of wrong connections.



TECHNICAL FEATURES

1. Mono-block spheroidal cast iron machine frame, completely redesigned;
2. Gears in cemented steels;
3. Heavy duty mechanical parts, for a better resistance and performance of the machine;
4. Increased cutting capacity.
5. No-repeat safety device (CE machines)
6. IP54 motherboard
7. 2 wheels



FEAL-SEAM S.r.l.

Via dell'Isola, 1/a

23900 Lecco (LC) - Italy

info@feal-seam.it

www.rebar-machines.com