

Versatile, high performance forward plate compactor

Premium asphalt plates feature a durable base plate for various applications. A true combination plate for various applications in the 85-90kg weight class.

Designed for the compaction of granular and mixed materials with some cohesive content in confined areas such as parking lots, highway and bridge construction, next to structures, curbs, and abutments. This computer designed base plate has a tapered bottom and edges for high speed and excellent manoeuvrability.




POWERED by
HONDA
norm SAE J1349




E-version coming soon

FEATURES AND BENEFITS

- Straight, centre-mounted guide handle offers superior manoeuvrability and can be lowered within inches of the surface to operate plate under obstacles and form work.
- Many lifting points and front lift cage offer easier loading and unloading for operator convenience.
- Compact design, easy to use, cast bottom plate.
- Smooth and flexible.
- Throttle mounted on the operating handle.

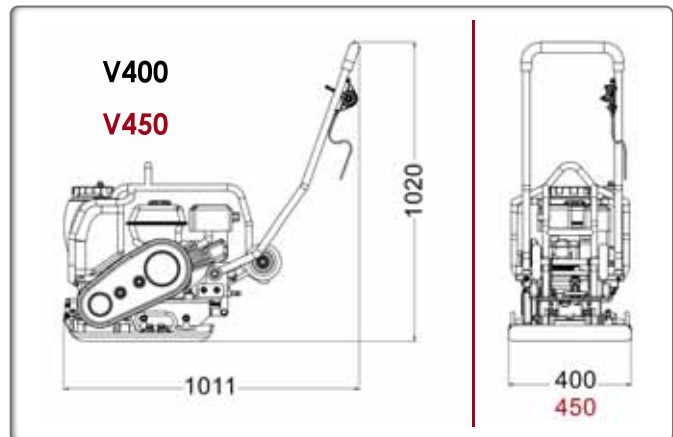

Code	V400COMBI	V450H2
Model	V400 COMBI	V450 COMBI
Operating mass (kg)	92	92
Centrifugal force (kN)	14	14
Plate width (mm)	450	450
Engine	Honda GX160	Honda GX160
Net power hp (kW)	4,8 (3,6)	4,8 (3,6)
Rated engine speed (rpm)	3600	3600
Fuel tank capacity (L)	6,1	6,1
Engine oil capacity (L)	0,6	0,6
Fuel consumption at rated power (L/h - rpm)	1,4 - 3600	1,4 - 3600
Water tank (L)	13	13
Speed (m/min)	21	21
Amplitude (mm)	0,89	0,89
Frequency (Hz)	95	95
Sound pressure level dB (A)	91	91
Vibrations* (m/s²)	2,62	2,62
Surface capacity (m²/h)	685	685
* Minimum vibration levels measured to EN ⁵⁰⁰⁻⁴		
Certified power SAE J 1349		

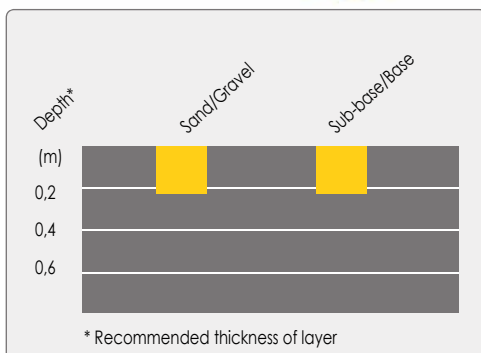

Option: Accessory - stone paving pad



OPTION : PAVING PAD	
Code	PPV-PAD400
	PPV-PAD450